


# \*SPECIFICATION\*

RoHS Compliant  
環保品


APPROVED BY

CUSTOMER : IP Khilimonchyk I.L.  
 CUS. PART NO. : PLA10AS2230R4D2  
 COILS PART NO. : UU10.5908105  
 DATE : 2011/2/24

## 1. DIMENSIONS (UNIT : mm)

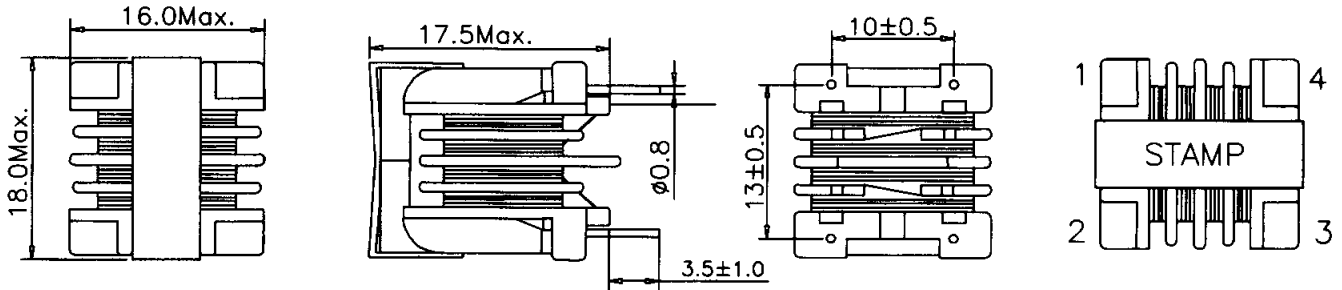

## 2. CONNECTION



“●” INDICATE WINDING START.

## 3. TURNS , WIRE AND CORE

TERMINAL	TURNS	WIRE
1 - 2	106T(REF.)	φ0.25mm UEW
4 - 3	106T(REF.)	φ0.25mm UEW
Core	A10(L) or Equivalent	


## 4. ELECTRICAL CHARACTERISTICS

ITEM	SPEC.	MEASURING CONDITION	MEASURING EQUIPMENT
INDUCTANCE (1-2)&(4-3)	22.0mH MIN	@ 10kHz / 1.0V	HP-4284A or Equivalent
D.C.R. (1-2)&(4-3)	1.40Ω Max.	@25°C	HP-34420A or Equivalent
RATED CUTRENT(1-4)	0.4A Max.	@ΔT=40°C (PIN2,3 SHORTED)	HP-E3632A&HP-34420A or Equivalent
HI-POT (WIRE-WIRE, WIRE-CORE)	AC 1000V 1S.	@50Hz, 2mA	Zentech 9053 or Equivalent
INSULATION RESISTANCE (WIRE-WIRE, WIRE-CORE)	100MΩ MIN.	DC 500V	Zentech 9053 or Equivalent

5. OPERATION TEMPERATURE: -25°C ~ +60°C  
 RATED VOLTAGE: AC 250V

## 6. VARNISH TREATMENT.

## 7. STAMP:

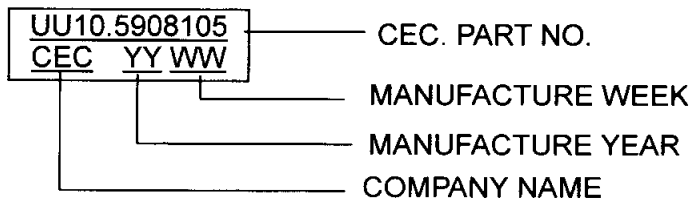

APPROVED BY    CHECKED BY    DESIGNED BY    REVISION    PAGE: 1/2

