




Model:JLV-12006P

INPUT:100~250VAC OUTPUT:0.5A 6W

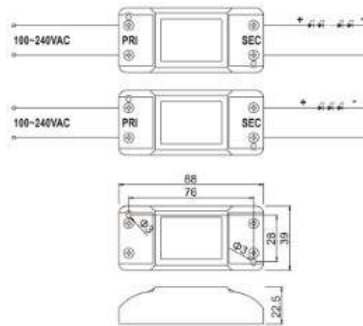

Features:

- Designd for 100% full loading
- EMC & LVD pass
- 100% full load burn-in tested
- Overload / short circuit protection
- Plastic housing, IP20/67 up to clients' requirement
- Compact size and high efficiency

Model	JLV-12006P
input voltage range	100~250VAC
Input frequency range	47~63Hz
Rate output voltage	DC12V/24V
Rate output current	0.5A
Rated DC output power	6W (100% full loading acceptable)
Conversion efficiency	>75%
Ripple noise	<100mV
Line regulation	<1%
Input-output Withstand Voltage (Hi-pot)	3750VAC/1min Drain current <5mA
Load regulation	<1%
Waterproof rate	IP20/67
Working temperature	-30~+50°C
Net weight	0.06KG
Dimension(mm)	88*39*23
Package	100pcs/carton
Carton size(cm)	26*19*23
Carton weight	6KG

