


JLV-12045KA

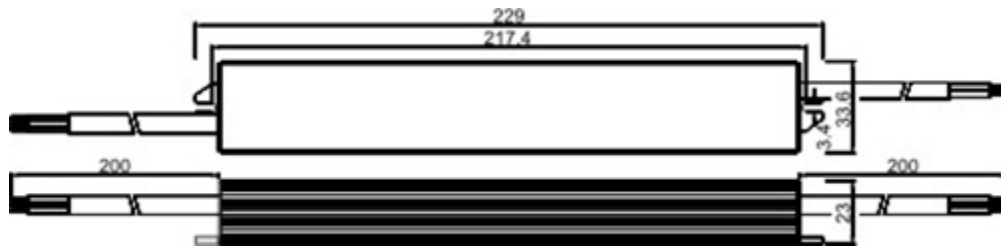

Features:

- Real 30W output, designed for 100% full loading constantly
- Aluminium housing, 100% waterproof, IP 67
- 100% full load burn-in tested
- Overload / short circuit protection
- Universal input voltage (100V~250V)
- Plug is available
- OEM is acceptable

Model	JLV-12045KA
input voltage range	90~264VAC
Input frequency range	47~63Hz
Rate output voltage	DC12V
Rate output current	3.7A
Rated DC output power	45W (100% full loading acceptable)
Conversion efficiency	>83%
Ripple noise	<100mV
Line regulation	<1%
Input-output Withstand Voltage (Hi-pot)	3750VAC/1min Drain current <5mA
Load regulation	<1%
Waterproof rate	IP67
Working temperature	-20~+50 °C
Net weight	0.34KG
Dimension(mm)	180*33*23
Package	50pcs/carton
Carton size(cm)	38*22*26
Carton weight	12.5KG