MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.





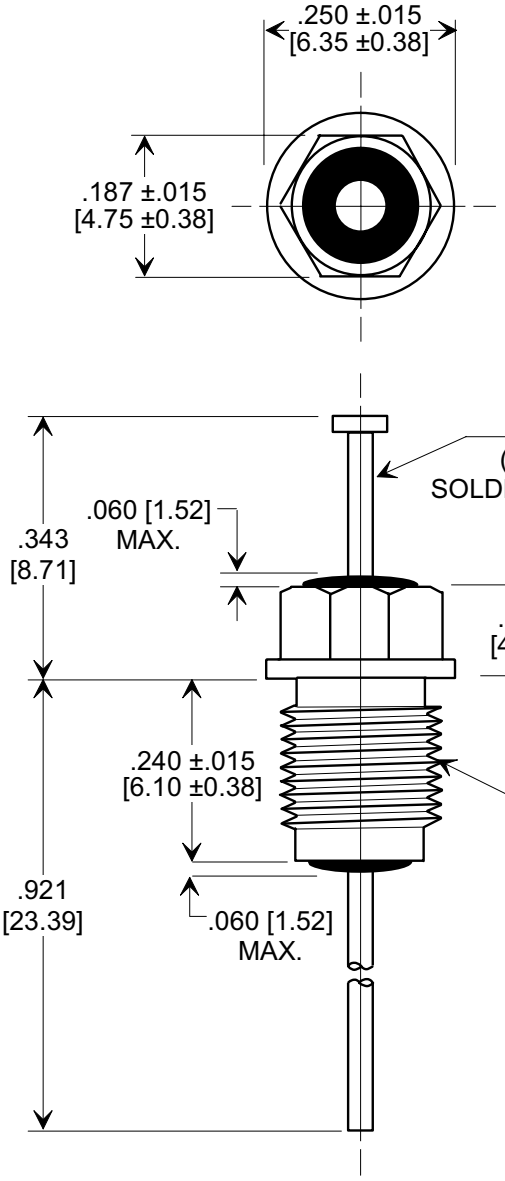

SILVER PLATED MOUNTING HARDWARE

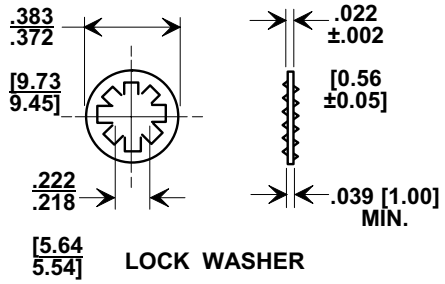

LOCK WASHER

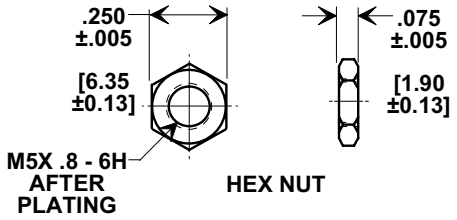

HEX NUT

5500	350	100	10 A	I.R. MIN. @ 100 (VDC.)	DWV	20	65	70	70
	85°C	125 °C				10 MHz	100 MHz	1 GHz	10 GHz
MIN. CAP. (pF)	WORKING VOLTAGE (WVdc)		CURRENT IDC	10 G Ω	700 vdc	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			

REVISION RECORD

0	Original Release C.O. 4668	WVDC 85° C WAS 200. E.C. 03-18-97
1	970318-2	RDN TO COMP FMT & ADDED L WASHER, HET NUT & NOTE 1. S.M. 10-20-98
2	19981019-5-01	ADDED METRIC, CIRCUIT & ORIENTATION. S.M. 12-18-01
3	20011210-2-04	CAP WAS 5000. FIXED METRIC 2 PLCS. S.M. 07-14-03
4	20030711-1-01	SOLDER PLATED,SOLDER PLATED COPPER,SILVER PLATED BRASS & IR MIN. @ 100 VDC &DWV COLUMNS ADDED & NOTE DELETED L.E. 01-30-04
5	20040130-1-01	

TUSONIX
TUCSON, ARIZONA

-- TOLERANCES --
Unless Otherwise Specified

2 Place Decimal ±
3 Place Decimal ± .031 [0.79]
Angles ±

Title
BUSHING STYLE EMI FILTER

Drawn S.M. 10-20-98

Approved S.C. 10-20-98

A

4209-053

X-2015 Rev-0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tusonix / CTS:
4209-053LF