
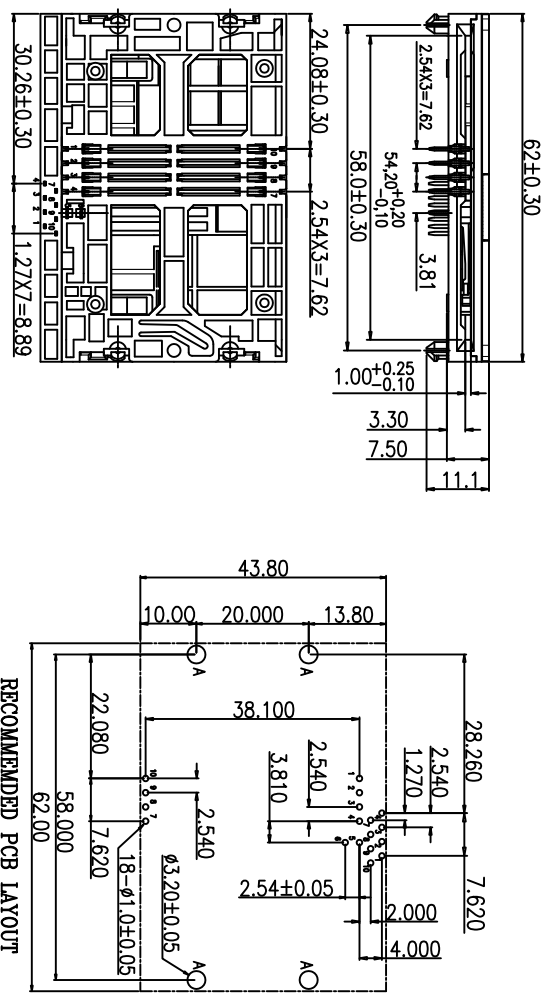


WHEN CARD IS EJECTED	WHEN CARD IS INSERTED	A Housing	PBT UL94V-0 Black
CLOSE	OPEN	B Contact	Phosphor Bronze, C5191 Contact Area: 3u" Gold/Solder Area: Tin Plating
		C Switch	Phosphor Bronze C5191, Contact Area: Gold Flash

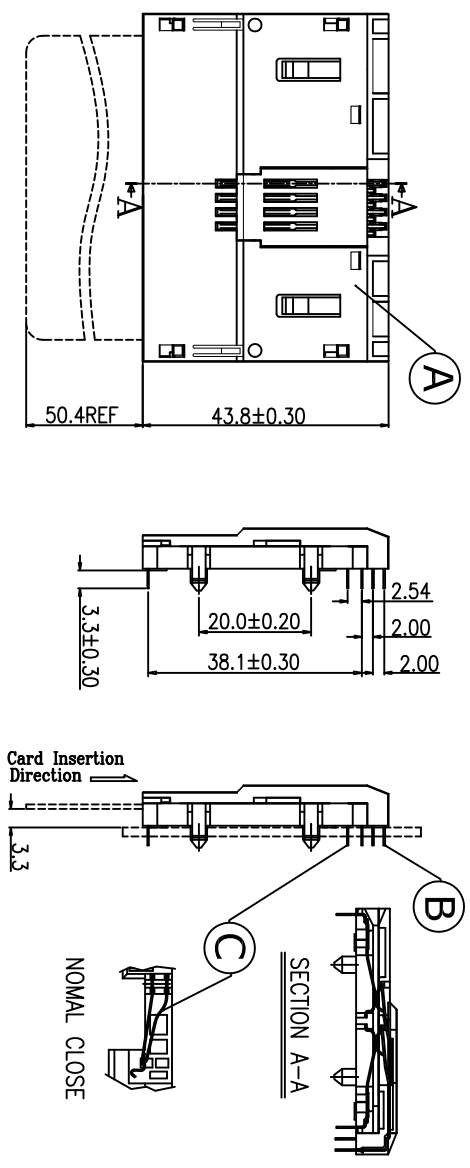

SPECIFICATION:

1. ELECTRICAL
 - 1.1 Current Rating: 1.0A
 - 1.2 Voltage Rating: 100V AC/DC
 - 1.3 Contact Resistance: 50mΩ
 - 1.4 Insulation Resistance: 1000MΩ
 - 1.5 Dielectric Withstanding Voltage: 500VDC
2. MECHANICAL
 - 2.1 Durability: 10000 Cycle
3. ENVIRONMENTAL
 - 3.1 Operating temperature range: -40°C ~ +85°C
 - 3.2 Storage temperature range: -40°C ~ +85°C
4. SOLDER ABILITY
 - 4.1 Recommended IR Reflow Temperature: 260°C

Vcc	RST	CLK	CD1	CD2	I/O	Vpp	GND
P1	P2	P3	P4	P5	P6	P7	P8
P9	P10	P11	P12	PIN ASSIGNMENT			

PRODUCT NO.	116F-DBC0	DESCRIPTION	Smart Card Socket Two-Sided Card Insertion, Contact Area: 3u" Gold
-------------	-----------	-------------	--

ANGLES	ANG.	±5°
LINEAR		±0.3
		±0.25
		±0.20
SCALE	AS SHOWN	UNIT: mm



www.attend.com.tw

DRAWN NAME:	Wlllls	2013/09/24
CHECKED	Angel	2013/09/24
APPROVED	Ken	2013/09/24

DATE	SIZE	REV.	FILE NAME
	A4	1.0	116F-DBC0_B.2

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION
1				

- △ Revise: Add Pin Assignment
- △ Revise: Add Pin Assignment