


QUAD 3-STATE NONINVERTING BUFFERS

High-Speed Silicon-Gate CMOS

The IN74AC125 is identical in pinout to the LS/ALS125, HC/HCT125. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LS/ALS outputs.

The IN74AC125 noninverting buffers are designed to be used with 3-state memory address drivers, clock drivers, and other bus-oriented systems. The devices have four separate output enables that are active-low.

- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0 μ A; 0.1 μ A @ 25°C
- High Noise Immunity Characteristic of CMOS Devices
- Outputs Source/Sink 24 mA

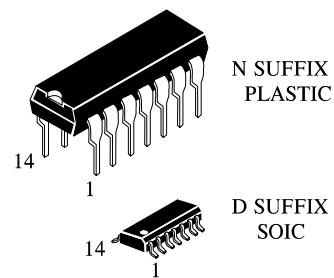


ORDERING INFORMATION

IN74AC125N Plastic
IN74AC125D SOIC

$T_A = -40^\circ$ to 85° C for all packages

LOGIC DIAGRAM

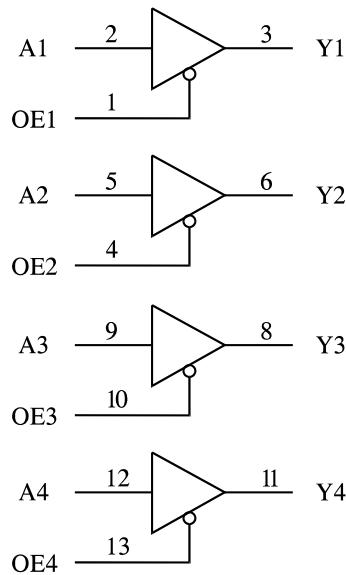

PIN 14 = V_{CC}
PIN 7 = GND

PIN ASSIGNMENT

OE1	1 ●	14	V_{CC}
A1	2	13	OE4
Y1	3	12	A4
OE2	4	11	Y4
A2	5	10	OE3
Y2	6	9	A3
GND	7	8	Y3

FUNCTION TABLE

Inputs		Output
A	OE	Y
H	L	H
L	L	L
X	H	Z

X = don't care
Z = high impedance

MAXIMUM RATINGS*

Symbol	Parameter	Value	Unit
V_{CC}	DC Supply Voltage (Referenced to GND)	-0.5 to +7.0	V
V_{IN}	DC Input Voltage (Referenced to GND)	-0.5 to $V_{CC} + 0.5$	V
V_{OUT}	DC Output Voltage (Referenced to GND)	-0.5 to $V_{CC} + 0.5$	V
I_{IN}	DC Input Current, per Pin	± 20	mA
I_{OUT}	DC Output Sink/Source Current, per Pin	± 50	mA
I_{CC}	DC Supply Current, V_{CC} and GND Pins	± 50	mA
P_D	Power Dissipation in Still Air, Plastic DIP+ SOIC Package+	750 500	mW
Tstg	Storage Temperature	-65 to +150	°C
T_L	Lead Temperature, 1 mm from Case for 10 Seconds (Plastic DIP or SOIC Package)	260	°C

*Maximum Ratings are those values beyond which damage to the device may occur.
Functional operation should be restricted to the Recommended Operating Conditions.

+Derating - Plastic DIP: - 10 mW/°C from 65° to 125°C
SOIC Package : - 7 mW/°C from 65° to 125°C

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V_{CC}	DC Supply Voltage (Referenced to GND)	2.0	6.0	V
V_{IN}, V_{OUT}	DC Input Voltage, Output Voltage (Referenced to GND)	0	V_{CC}	V
T_J	Junction Temperature (PDIP)		140	°C
T_A	Operating Temperature, All Package Types	-40	+85	°C
I_{OH}	Output Current - High		-24	mA
I_{OL}	Output Current - Low		24	mA
t_r, t_f	Input Rise and Fall Time * $V_{CC} = 3.0$ V (except Schmitt Inputs) $V_{CC} = 4.5$ V $V_{CC} = 5.5$ V	0	150 40 25	ns/V

* V_{IN} from 30% to 70% V_{CC}

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{IN} and V_{OUT} should be constrained to the range $GND \leq (V_{IN} \text{ or } V_{OUT}) \leq V_{CC}$.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

IN74AC125

DC ELECTRICAL CHARACTERISTICS(Voltages Referenced to GND)

Symbol	Parameter	Test Conditions	V_{CC} V	Guaranteed Limits		Unit
				25 °C	-40°C to 85°C	
V_{IH}	Minimum High-Level Input Voltage	$V_{OUT} = V_{CC} - 0.1$ V	3.0 4.5 5.5	2.1 3.15 3.85	2.1 3.15 3.85	V
V_{IL}	Maximum Low - Level Input Voltage	$V_{OUT} = 0.1$ V	3.0 4.5 5.5	0.9 1.35 1.65	0.9 1.35 1.65	V
V_{OH}	Minimum High-Output Voltage	$I_{OUT} \leq -50$ μ A	3.0 4.5 5.5	2.9 4.4 5.4	2.9 4.4 5.4	V
		* $V_{IN} = V_{IH}$ $I_{OH} = -12$ mA $I_{OH} = -24$ mA $I_{OH} = -24$ mA	3.0 4.5 5.5	2.56 3.86 4.86	2.46 3.76 4.76	
V_{OL}	Maximum Low-Output Voltage	$I_{OUT} \leq 50$ μ A	3.0 4.5 5.5	0.1 0.1 0.1	0.1 0.1 0.1	V
		* $V_{IN} = V_{IL}$ $I_{OL} = 12$ mA $I_{OL} = 24$ mA $I_{OL} = 24$ mA	3.0 4.5 5.5	0.36 0.36 0.36	0.44 0.44 0.44	
I_{IN}	Maximum Input Leakage Current	$V_{IN} = V_{CC}$ or GND	5.5	± 0.1	± 1.0	μ A
I_{OZ}	Maximum Three-State Leakage Current	V_{IN} (OE) = V_{IH} or V_{IL} $V_{IN} = V_{CC}$ or GND $V_{OUT} = V_{CC}$ or GND	5.5	± 0.5	± 5.0	μ A
I_{OLD}	+Minimum Dynamic Output Current	$V_{OLD} = 1.65$ V Max	5.5		75	mA
I_{OHD}	+Minimum Dynamic Output Current	$V_{OHD} = 3.85$ V Min	5.5		-75	mA
I_{CC}	Maximum Quiescent Supply Current (per Package)	$V_{IN} = V_{CC}$ or GND	5.5	8.0	80	μ A

* All outputs loaded; thresholds on input associated with output under test.

+Maximum test duration 2.0 ms, one output loaded at a time.

Note: I_{IN} and I_{CC} @ 3.0 V are guaranteed to be less than or equal to the respective limit @ 5.5 V V_{CC}

IN74AC125

AC ELECTRICAL CHARACTERISTICS($C_L=50\text{pF}$, Input $t_r=t_f=3.0\text{ ns}$)

Symbol	Parameter	V_{CC}^* V	Guaranteed Limits				Unit	
			25 °C		-40°C to 85°C			
			Min	Max	Min	Max		
t_{PLH}	Propagation Delay, Input A to Output Y (Figure 1)	3.3 5.0	1.0 1.0	9.0 7.0	1.0 1.0	10 7.5	ns	
t_{PHL}	Propagation Delay, Input A to Output Y (Figure 1)	3.3 5.0	1.0 1.0	9.0 7.0	1.0 1.0	10 7.5	ns	
t_{PZH}	Propagation Delay, Output Enable to Y (Figure 2)	3.3 5.0	1.0 1.0	10.5 7.0	1.0 1.0	11 8.0	ns	
t_{PZL}	Propagation Delay, Output Enable to Y (Figure 2)	3.3 5.0	1.0 1.0	10 8.0	1.0 1.0	11 8.5	ns	
t_{PHZ}	Propagation Delay, Output Enable to Y (Figure 2)	3.3 5.0	1.0 1.0	10 9.0	1.0 1.0	10.5 9.5	ns	
t_{PLZ}	Propagation Delay, Output Enable to Y (Figure 2)	3.3 5.0	1.0 1.0	10.5 9.0	1.0 1.0	11.5 9.5	ns	
C_{IN}	Maximum Input Capacitance	5.0	4.5	4.5	4.5	4.5	pF	

C_{PD}	Power Dissipation Capacitance	Typical @25°C, $V_{CC}=5.0\text{ V}$	
		45	pF

*Voltage Range 3.3 V is $3.3\text{ V} \pm 0.3\text{ V}$

Voltage Range 5.0 V is $5.0\text{ V} \pm 0.5\text{ V}$

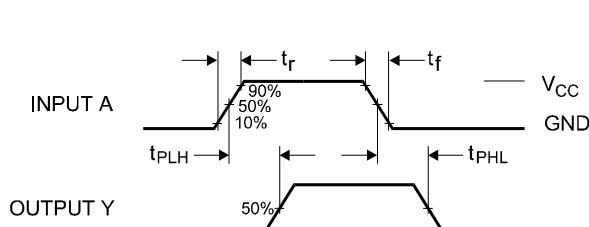


Figure 1. Switching Waveforms

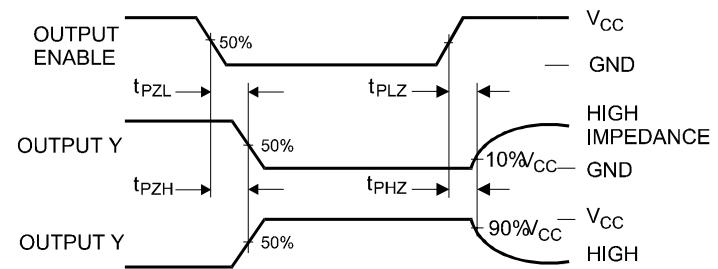


Figure 2. Switching Waveforms
EXPANDED LOGIC DIAGRAM
(1/4 of the Device)

