

Model: **XS9-4(Zn) 6.B.**

XS9-4(Zn) 6.B.



Material:

Outer covering: Adopt copper zinc alloy , the nut linking up adopt copper


Insulation sports : Adopt Arcolite (popular name Bakelite)

Contact the body : adopt high grade copper


| | | | | |
|----------------------------------|---------|---------|---------|---------|
| PINS | 2 | 3 | 4 | 5 |
| Rated current/voltage | 5A-260V | 5A-260V | 5A-125V | 5A-125V |
| Operatoin limit voltage | 250 | 250 | 200 | 200 |
| Withstanding vlotage 1 minute | 2000 | 2000 | 2000 | 2000 |
| Insulation resistance at DC 500V | 1500 | 1500 | 1500 | 1500 |
| Contact resistance At DC 1A | 12 | 12 | 12 | 12 |
| Solder cup mouth aperature | 0.9 | 0.9 | 0.9 | 0.9 |
| Solder inter OD | 1 | 1 | 1 | 1 |




XS9-A

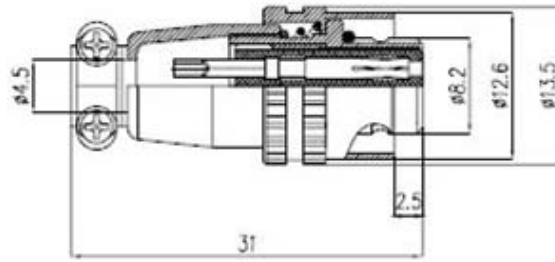

XS9-B

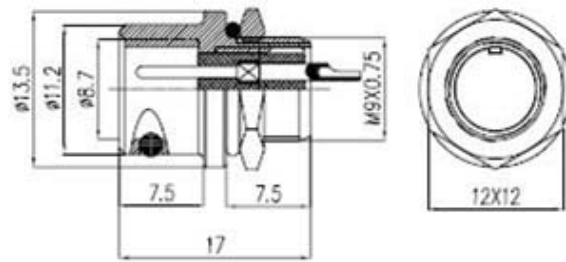

XS9F-A

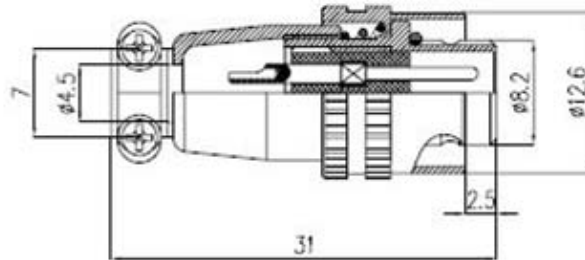

XS9F-B

