

5050 White 6500K 30° viewing angle SMD LED with lens (0.5W)


Part No.: LLS5050P6WW-65G-90-GJ-D30 0.5W

·Features

- Package size: 5.0mm×5.0mm SMT LED, 5.2mm thickness
- 0.5W high power LED
- Luminous intensity: 50-55lm
- Typ. radiation: 20-40°
- Suitable for all SMT assembly
- Moisture sensitivity level: Level 4
- PB Free products (Compliant with EU's RoHS)
- **Dice Material:** InGaN; **Light Color:** White; **Lens Color:** Yellow Diffused



·Package Dimensions

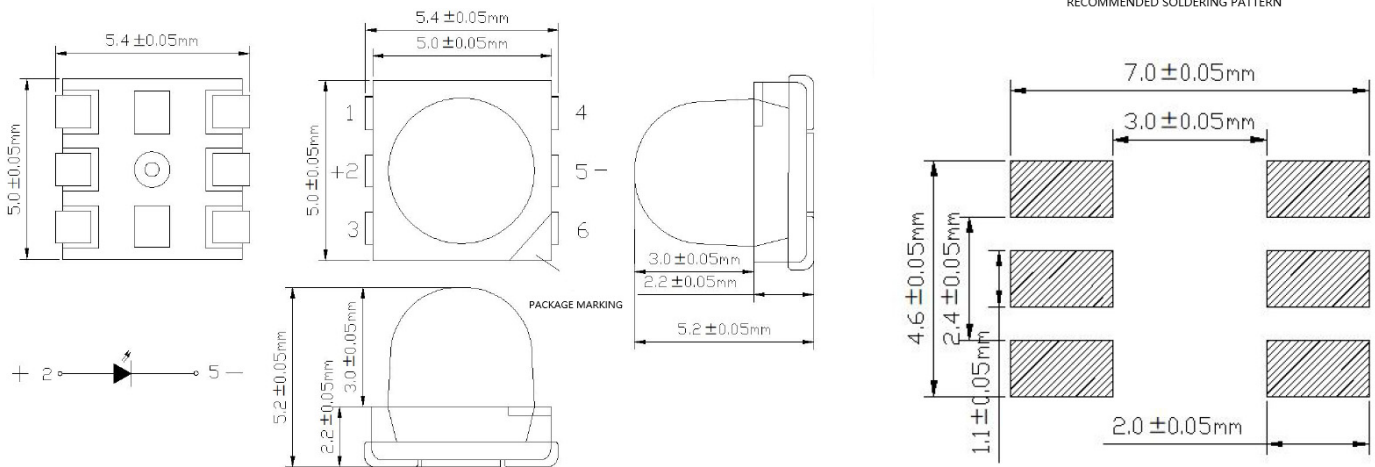

·Application

- Outdoor brightening lighting
- Application of car lights, traffic lights, wooden wall screens and pixel screens

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Maximum	Unit
Power Dissipation	P _d	500	mW
Continuous Forward Current	I _F	150	mA
Pulsed Forward Current (1/10 Duty Cycle 0.1ms Pulse Width)	I _{FP}	200	mA
Reverse Voltage	V _R	5	V
Electrostatic Discharge (HBM)	ESD	3000	V
Operating Temperature Range	T _{opr}	-40 to+85	°C
Storage condition	T _{stg}	-40 to +40	°C
	Humidity	< 60	%
Thermal Resistance	R _{thj-s}	20	°C/W
Junction Temperature	T _j	≤125	°C

NOTE:1/10 Duty cycle, 0.1ms pulse width.


Electrical/Optical Characteristics (Ta=25°C)

Item	Symbol	Condition	Min.	Typ.	Max	Unit
Forward Voltage	V _F	I _F =150mA	2.8	--	3.4	V
Luminous Intensity	I _v	I _F =150mA	45	--	65	lm
Color Temperature	CCT	I _F =150mA	65G (6100-6900K)			K
Viewing Angle	2θ _{1/2}	I _F =150mA	20	--	40	deg
Color rendering index	R _a	I _F =150mA	90			-
Reverse Current	I _R	V _R =5V	--	--	10	μ A

Note:

1. 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value
2. The above luminous flux measurement allowance tolerance is ±15%.
3. The above Color Rendering Index measurement allowance tolerance is ±2
4. The above forward voltage measurement allowance tolerance is ±0.1V


·Bin range of chromaticity coordinate

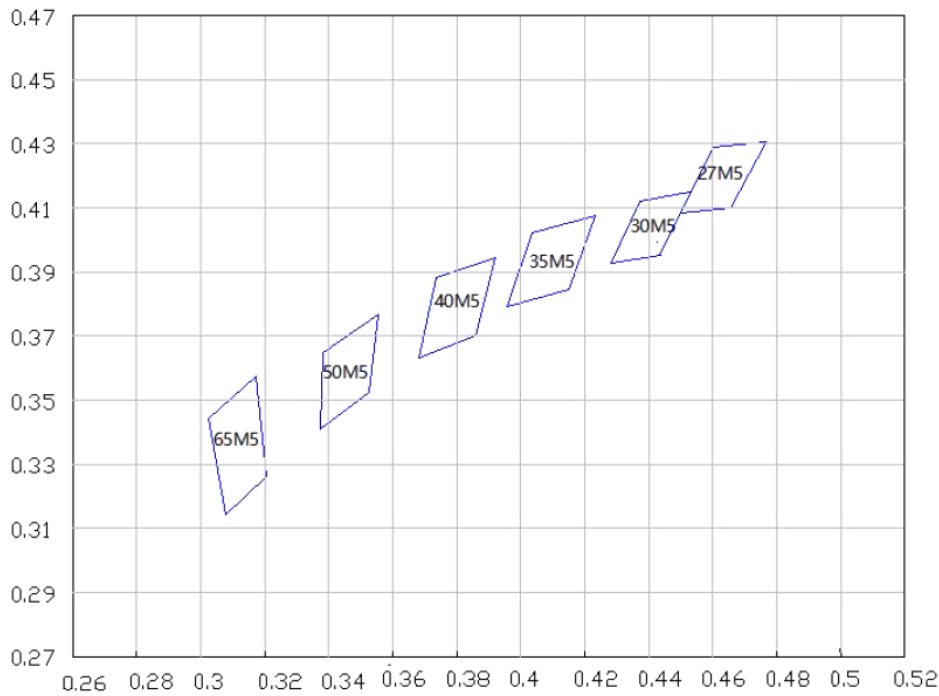


CCT	BIN	CIE-X	CIE-Y		CCT	BIN	CIE-X	CIE-Y
2640-2840K	27G (27M5)	0.4603	0.4289		2820-3070K	29G (30M5)	0.4373	0.4023
		0.4769	0.435				0.4530	0.4151
		0.4658	0.4102				0.4437	0.3953
		0.4499	0.4084				0.4282	0.3928
3280-3630K	35G (35M5)	0.4035	0.4024		3820-4270K	41G (40M5)	0.3734	0.3884
		0.4231	0.4076				0.3922	0.3943
		0.4151	0.3846				0.3860	0.3703
		0.3959	0.3751				0.3682	0.3630
4720-5270K	52G (50M5)	0.3383	0.3648		6100-6900K	65G (65M5)	0.3025	0.3444
		0.3555	0.3769				0.3171	0.3575
		0.3525	0.3523				0.3205	0.3262
		0.3373	0.3411				0.3080	0.3144

Typical Electro-Optical Characteristics Curves


Forward Voltage VS.Forward Current

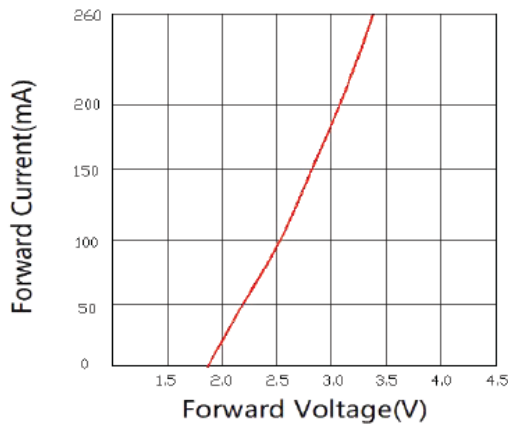


Forward Current VS.Relative Intensity

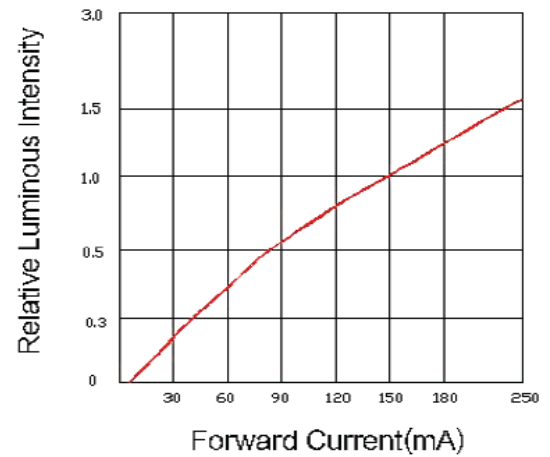


Ambient Temperature VS.Relative Intensity

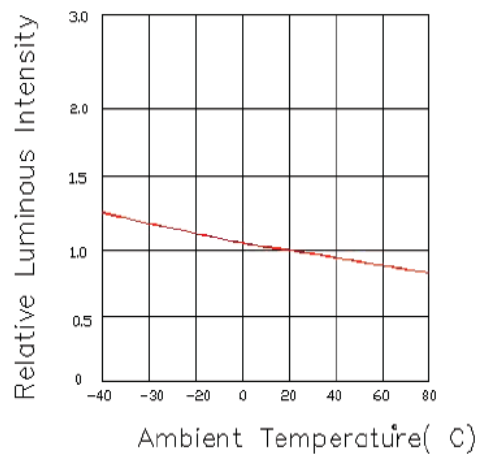


Soldering Temperature VS.Forward Current

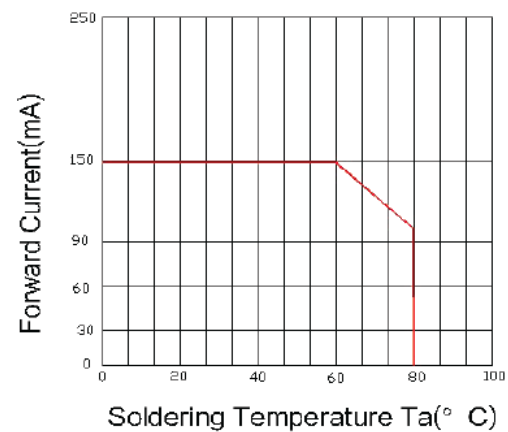

Relative Spectral emission

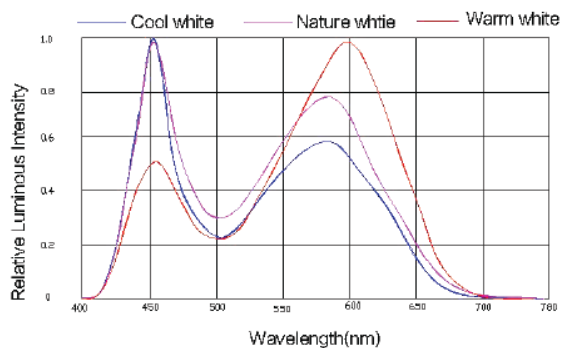

Radiation diagram

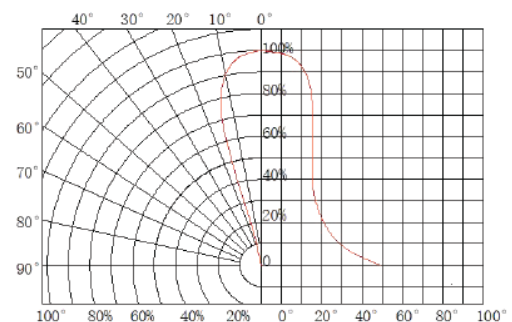

·Reliability test items and conditions

Test Items	Ref. standard	Test Condition	Time	Quantity	Ac/Re
Reflow	IEC/TR 60068-3-12-2014	Temp:260°C max T=8 sec	3 times	22PCS	0/1
Temperature cycle	IEC60068-2- 14 : 2009	85°C±5°C 30min ↑↓5 min -40°C±5°C 30min	100Cycles	22PCS	0/1
High humidity heat life test	IEC60068-2-78: 2001	Ta=85°C RH=85% IF=150mA	500H	22PCS	0/1
High temperature storage	Tested with LITEKEY standard	Temp:85°C±5°C	1000H	22PCS	0/1
Low temperature storage	IEC60068-2-1: 2007	Temp:-40°C±5°C	1000H	22PCS	0/1
Life test	Tested with LITEKEY standard	Ta=25°C±5°C IF=150mA	1000H	22PCS	0/1

·Failure Criteria


Test Items	Symbol	Test Condition	Failure criteria	
			Min.	Max.
Forward voltage	VF	IF=150mA	--	U. S. L*) x1. 1
Reverse Current	IR	VR = 5V	--	10uA
Luminous Intensity	Im	IF=150mA	L. S. L*) x0. 7	

U. S. L: Upper Specification Limit

L. S. L: Lower Specification Limit


Package Tape specifications (1002 pcs/Reel)

Packing unit 1002pcs/reel

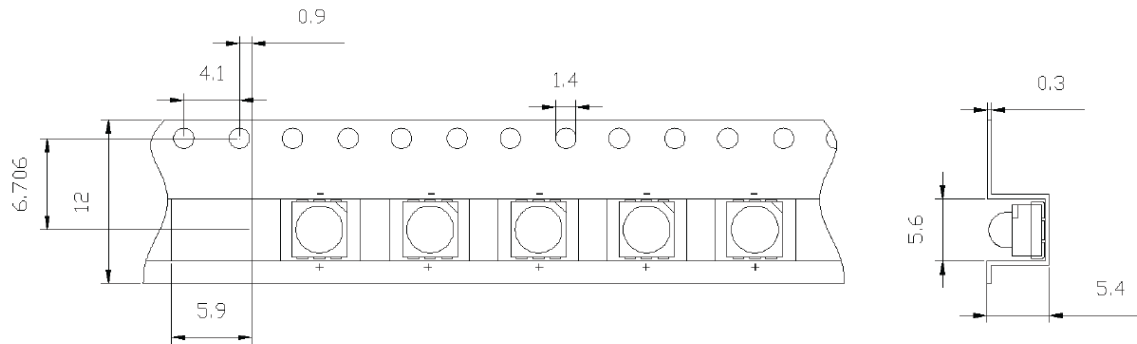


Adhesion Strength of Cover Tape : Adhesion strength to be 0.1 – 0.7N when the cover tape is turned off from the carrier at 10°angle to be the carrier tape

Reel Dimensions

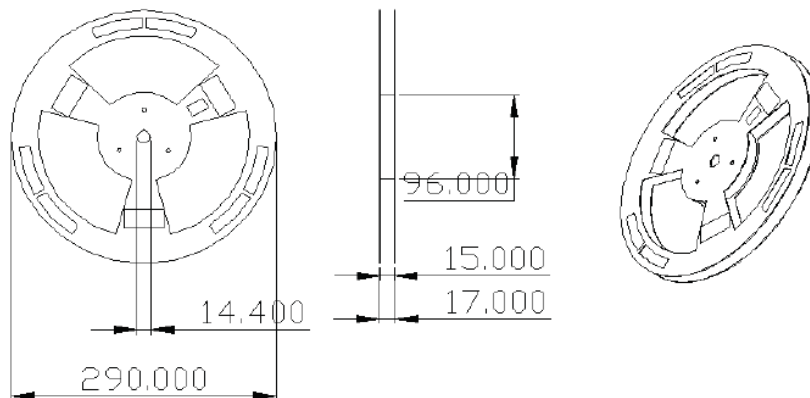


Moisture Resistant Packaging

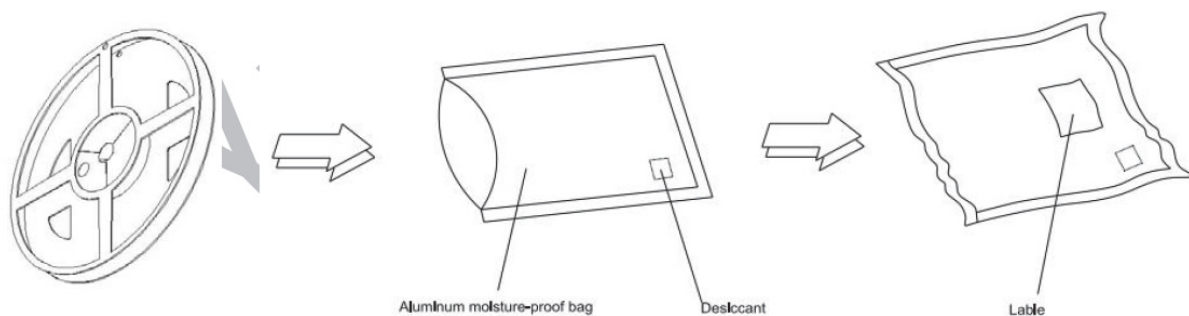


·Reflow soldering instructions:

1. Number of reflow process shall be only 1 time.

A. Lead Solder:

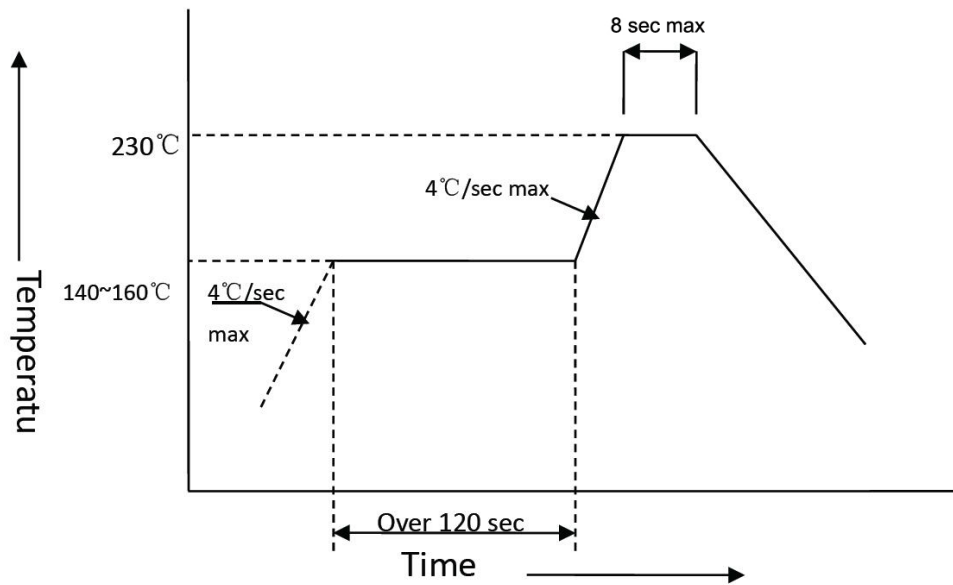

B. Lead-Free Solder:

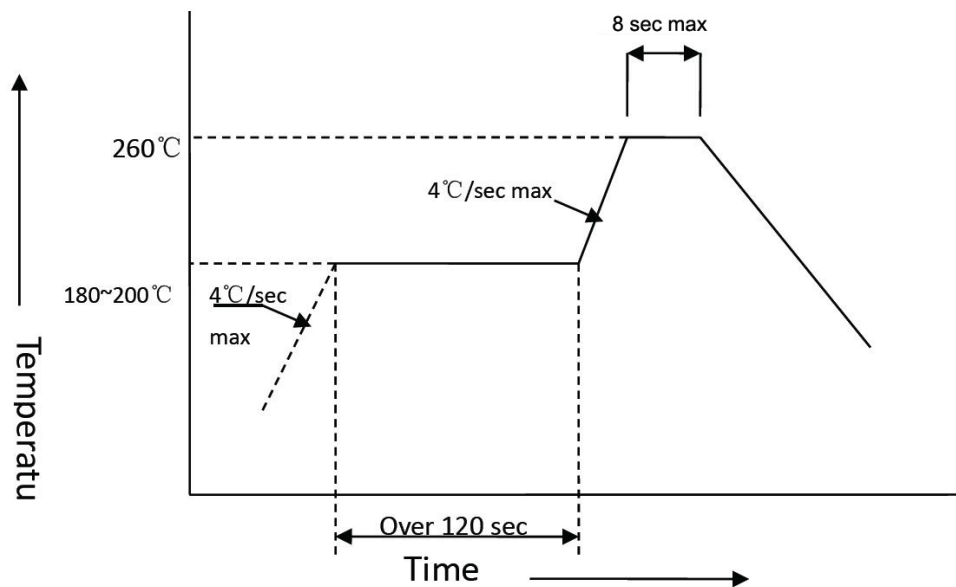

·SMD LED Instruction Manual

Thank you for your trust and support to our company. To enhance your understanding of the product characteristics of our company, it is convenient for you to grasp the characteristics of its use during use, to minimize or avoid unnecessary product damage or performance mismatch caused by human factors. Specifically, as below:

1. Moisture Resistant and vacuum Packaging

All the SMD LEDs are packed in moisture-proof and anti-static aluminum foil bags. During handling, it is necessary to avoid squeezing and puncturing the packaging bags to cause leakage of the moisture-proof bags.

2. Material confirmation

Please check the package for leaks, other damage, and check if the label matches your company's requirements. If you find an abnormality, please contact us in time.

3. Unopened SMD led storage

The unopened SMD led should not be stored for a long time as much as possible, because the storage environment is not easy to control. You can choose a recent delivery based on your production schedules.

The storage environment is best to choose moisture proof cabinet, the temperature is about 30 degrees, the humidity is below 60%, and in this case:

(1) RGB products can be stored for 30 days.

(2) White light products can be stored for 60 days.

(3) 3528 dome series and 3535 RGB moisture proof series can be stored for 2-3 months.

◎ Regardless of whether the storage time is exceeded or not, please be sure to perform the first test before production. If you find an abnormality, please contact us in time.

◎ If the LEDs have not been used in time, it is recommended to use oven baking dehumidification(The dehumidification conditions be adjusted according to products).

4. Precautions after unpacking

After receiving the SMD led from our company, please arrange the production as soon as possible. Due to the different storage environments of each warehouse, it is not recommended to make large quantities of stocks.

After opening the package:

◎ If the package is intact, it will be better to bake at 70° for 12 hours before reflow soldering process.

◎ It is not recommended to store the SMD led after unpacking. Please accurately calculate the demand for the production line. If storage is required, it is recommended to store in a 60-degree oven.

◎ In the conditions of $25\pm 5^{\circ}\text{C}$ and $45\pm 15\% \text{ RH}$, the soldering process must be completed within 12 hours;

◎ If it is not in the range of $25\pm 5^{\circ}\text{C}$ and $45\pm 15\% \text{ RH}$, the soldering process must be completed within 6 hours. If not completed, a) unsealing, it is recommended to be stored in the oven at 70-degree low temperature before use; b) vacuum packing, it is best to choose moisture proof cabinet, the temperature is about 30 degrees, the humidity is below 60%.

5. It is not recommended to mix different batches of SMD led

Test before the production according to the first inspection standard. If you find any abnormality in the SMD led, please contact us. Please do not mix different batches of SMD led during the production process. If you can't avoid it, you need to use the LEDs of the previous batch. Please confirm the package is normal, and then confirm the first piece. Finally, the products produced by this batch of SMD led are separately distinguished.

6. In the production process, please fill in the reflow soldering after the patch is completed, **and the reflow soldering is not repeatable.** Reflow soldering. Check the ESD protection measures during soldering and assembly.

7. SMD led for outdoor application, the finished product design is to use a cover lens as much as possible, and then potting seal. It is not recommended to seal directly on the surface of the lamp. The potting glue should try to choose glue with low permeability and oxygen permeability and good adhesion to aluminum. The controller's negative pressure should be minimized.

8. Finished luminaires that have been installed outdoors. If the luminaires cannot be used in time after commissioning, please pay attention to the timing aging. Please use a small current to illuminate all the chips in the early stage of aging. Do not scan the program. After aging for two hours, the current is gradually amplified; do not scan the program, and often aging for 4 hours once a month. In the initial stage of use, please adjust the speed of the controller to the slowest and the color conversion speed is the slowest.

·Other

1. Above specification may be changed without notice. LITEKEY will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. LITEKEY assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of LITEKEY. Please don't reproduce cause by anyone to reproduce them without LITEKEY's consent.