

# TERMINAL BLOCK Connector



## Pluggable Series

KLS2-EDK-3.50/3.81 Series Pitch=3.50mm/3.81mm

### Electrical :


- Rated voltage: 300V
- Rated current: 8A
- Contact resistance: 20mΩ
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: AC1500V/1Min
- Wire range: 18AWG 1mm<sup>2</sup>

### Material

- Contact: Phosphor bronze
- Pin header: Brass, Tin plated
- Housing: PA66, UL94V-0

### Mechanical

- Temp. Range: -40°C~+105°C
- MAX Soldering: +250°C for 5 Sec.
- Strip length: 5-6mm

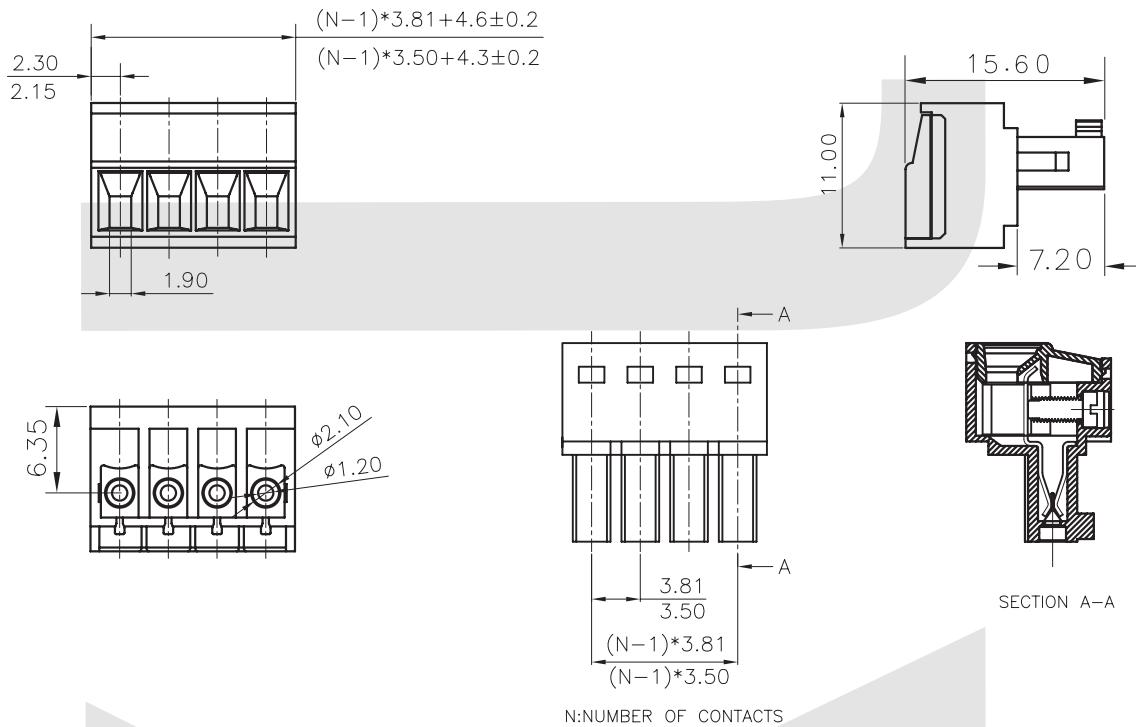

## ORDER INFORMATION

Product NO.: KLS2-EDK-3.50-XXP X X X

- Pos. NO. \_\_\_\_\_
- Series No. \_\_\_\_\_
- Pitch 3.50=3.50mm 3.81=3.81mm \_\_\_\_\_
- Number of Pole \_\_\_\_\_
- Customer Request \_\_\_\_\_
- Screw: C=Cross Screw S=Slot Screw \_\_\_\_\_
- Color: 1=Gray 2=Blue 3=Black  
4=Green 5=Orange 6=Red  
7=Transparent 8=Yellow 9=White