REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/09/05'		

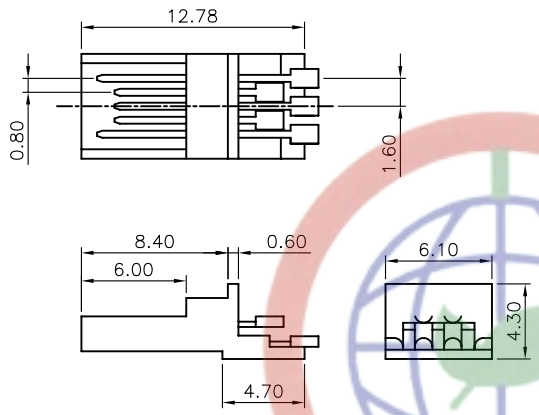

Housing with contact

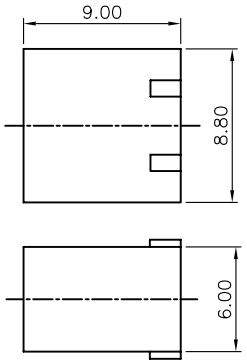



Hood

NOTES:

1.SPECIFICATIONS
- .CURRENT RATING: 0.5A/pin Max.
- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min
- .TEMPERATURE RANGE: −20°C−+70°C

2.MATERIALS
- .HOUSING: PBT.
- .HOOD: ABS.
- .SHELL: STEEL
- .CONTACT: COPPER ALLOY

3.PRODUCT NUMBER CODE:

DS1105−01 − X X X X

- Contact plating
  - 0: Selective gold flash
  - C: Selective 3u" gold
  - 3: Selective 30u" gold
- Shell plating
  - 6: Tin
  - N: Nickel
  - 8: Full gold
- Color of Hood
  - B: BLACK
- Color of housing
  - B: BLACK
- Products series
  - DS1105−01



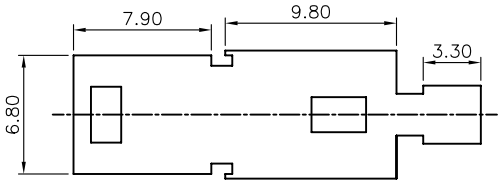

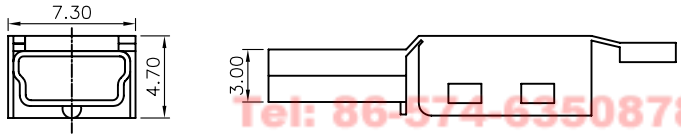

Down shell

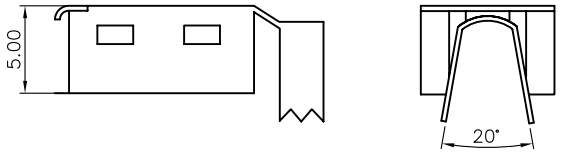

Upper shell

Tel: 86-574-63508787
Fax: 86-574-63510817
E-mail: sale@chenqin.com.cn
Http://www.chenqin.com.cn
Add: West Shaohe Town, Cixi Ningbo China
P.C.:315321

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1105−01−XXX		

PROJECTION		TITLE	MINI USB 5PIN B TYPE MALE SOLDER
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1105−01 SERIES

晨翔电子有限公司

CONNFLY ELECTRONIC CO. LTD