

3A 150KHz 30V Buck DC to DC Converter**XL1507****Features**

- Wide 4.75V to 30V Input Voltage Range
- 3.3V,5V,12V, and adjustable versions
- Output Adjustable from 1.23V to 28V
- Maximum Duty Cycle 100%
- Minimum Drop Out 1.5V
- Fixed 150KHz Switching Frequency
- 3A Constant Output Current Capability
- Internal Optimize Power Transistor
- Up to 90% Efficiency
- Excellent line and load regulation
- TTL shutdown capability
- Built in Frequency Compensation
- Built in Thermal Shutdown Function
- Built in Current Limit Function
- Built in Short Protection Function
- Available in TO-252 package

Applications

- LCD Monitor and LCD TV
- Digital Photo Frame
- Set-up Box
- ADSL Modem
- Telecom / Networking Equipment

General Description

The XL1507 is a 150 KHz fixed frequency PWM buck (step-down) DC/DC converter, capable of driving a 3A load with high efficiency, low ripple and excellent line and load regulation. Requiring a minimum number of external components, the regulator is simple to use and include internal frequency compensation and a fixed-frequency oscillator.

The PWM control circuit is able to adjust the duty ratio linearly from 0 to 100%. An enable function, an over current protection function and a short circuit protection function are built inside. When OCP or SCP happens, the operation frequency will be reduced from 150KHz to 50KHz. An internal compensation block is built in to minimize external component count.




Figure1. Package Type of XL1507 (TO252-5L)

3A 150KHz 30V Buck DC to DC Converter

XL1507


Pin Configurations (TO252-5L)

Figure2. Pin Configuration of XL1507 (Top View)

Table 1 Pin Description

Pin Number	Pin Name	Description
1	Vin	Supply Voltage Input Pin. XL1507 operates from a 4.75V to 30V DC voltage. Bypass Vin to GND with a suitably large capacitor to eliminate noise on the input.
2	Output	Power Switch Output Pin (SW). Output is the switch node that supplies power to the output.
3	GND	Ground Pin. Care must be taken in layout. This pin should be placed outside of the Schottky Diode to output capacitor ground path to prevent switching current spikes from inducing voltage noise into XL1507.
4	Feedback	Feedback Pin (FB). Through an external resistor divider network, Feedback senses the output voltage and regulates it. The feedback threshold voltage is 1.23V.
5	ON/OFF	Enable Pin. Drive ON/OFF pin low to turn on the device, drive it high to turn it off. Floating is default low.

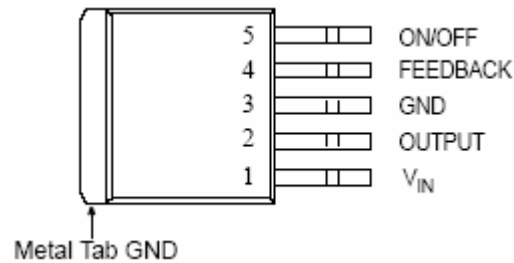Function Block

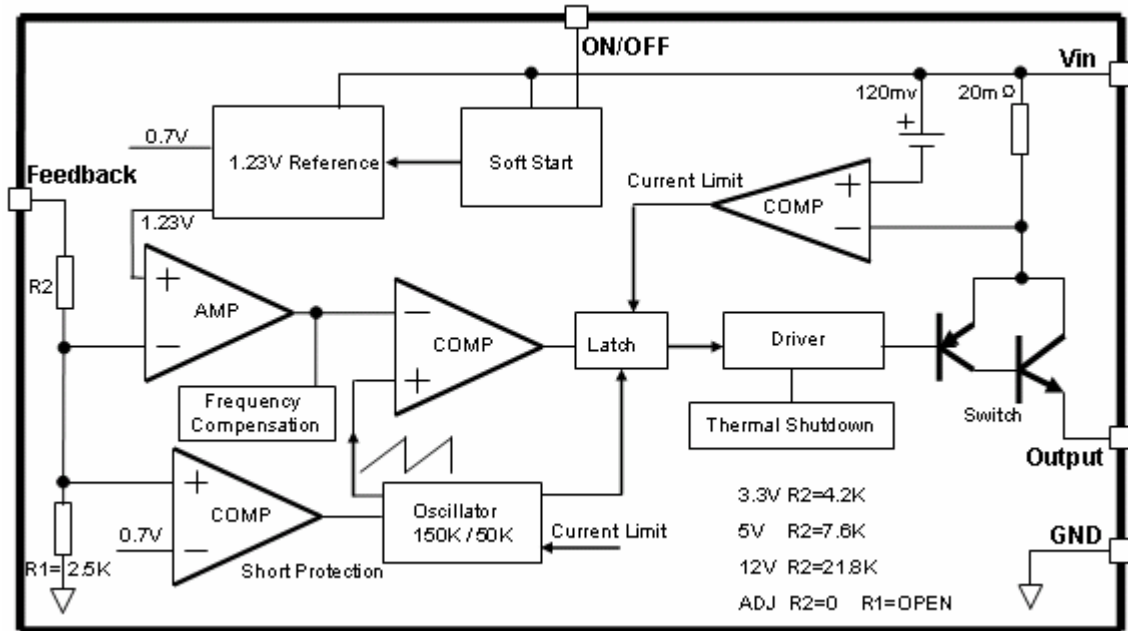


Figure3. Function Block Diagram of XL1507

Typical Application Circuit

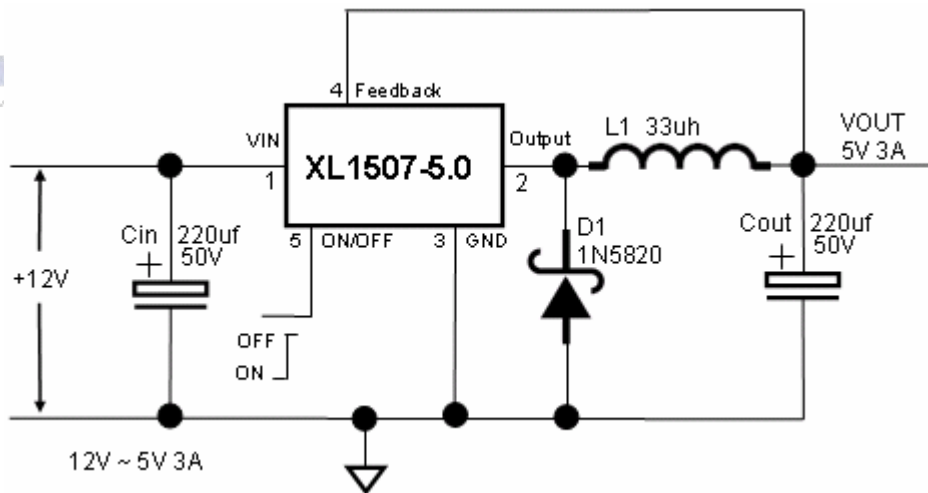
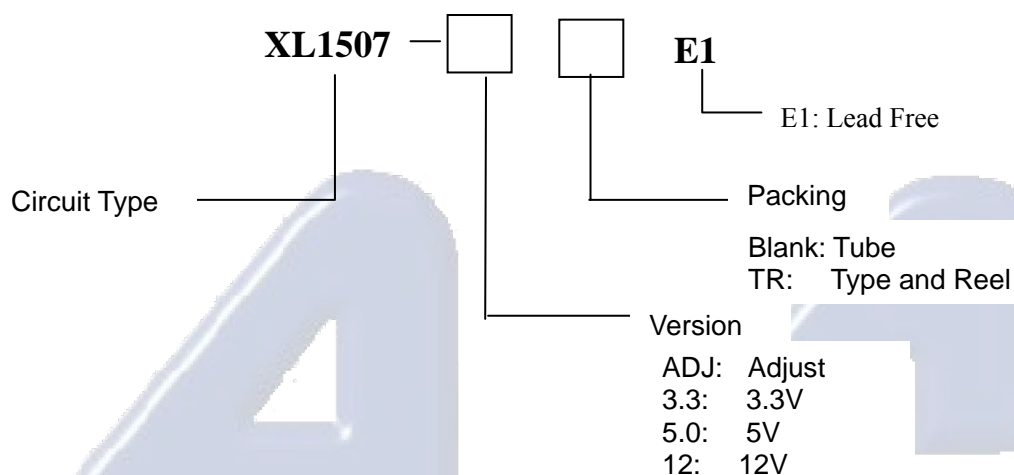


Fig4. XL1507 Typical Application Circuit 12V-5V/3A

3A 150KHz 30V Buck DC to DC Converter

XL1507

Ordering Information

Package	Temperature Range	Part Number	Marking ID	Packing Type
		Lead Free	Lead Free	
TO252-5L	-40°C ~ 85°C	XL1507-ADJE1	XL1507-ADJE1	Tube
		XL1507-3.3E1	XL1507-3.3E1	Tube
		XL1507-5.0E1	XL1507-5.0E1	Tube
		XL1507-12E1	XL1507-12E1	Tube
		XL1507-ADJTRE1	XL1507-ADJTRE1	Tape & Reel
		XL1507-3.3TRE1	XL1507-3.3TRE1	Tape & Reel
		XL1507-5.0TRE1	XL1507-5.0TRE1	Tape & Reel
		XL1507-12TRE1	XL1507-12TRE1	Tape & Reel

XLSEMI Pb-free products, as designated with “E1” suffix in the part number, are RoHS compliant.

3A 150KHz 30V Buck DC to DC Converter

XL1507

Absolute Maximum Ratings (Note1)

Parameter	Symbol	Value	Unit
Input Voltage	V _{in}	-0.3 to 32	V
Feedback Pin Voltage	V _{FB}	-0.3 to V _{in}	V
ON/OFF Pin Voltage	V _{ON/OFF}	-0.3 to V _{in}	V
Output Switch Pin Voltage	V _{Output}	-0.3 to V _{in}	V
Power Dissipation	P _D	Internally limited	mW
Thermal Resistance (TO252) (Junction to Ambient, No Heatsink, Free Air)	R _{JA}	60	°C/W
Operating Junction Temperature	T _J	-40 to 125	°C
Storage Temperature	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering, 10 sec)	T _{LEAD}	260	°C
ESD (HBM)		4000	V

Note1: Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Electrónica S.A. de C.V.

3A 150KHz 30V Buck DC to DC Converter

XL1507

Electrical Characteristics (DC Parameters)

$V_{in} = 12V$ for the 3.3V,5V,and Adjustable versions and $V_{in}=24V$ for the 12V version, $GND=0V$, V_{in} & GND parallel connect a 220uf/50V capacitor; $I_{out}=500mA$, $T_a = 25$; the others floating unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input operation voltage	V_{in}		4.75		30	V
Shutdown Supply Current	I_{STBY}	$V_{ON/OFF}=5V$		100	200	μA
Quiescent Supply Current	I_q	$V_{ON/OFF} = Gnd,$ $V_{FB} = V_{in}$		2	5	mA
Switch Current Limit	I_L	$V_{FB} = 0$	3.6	4.8	6.9	A
ON/OFF Pin Threshold	$V_{ON/OFF}$	$V_{FB} = 0V,$ $V_{ON/OFF}$ from 0.5V~2V		1.3		V
ON/OFF Pin Input Leakage Current	I_H	$V_{ON/OFF} = 2.5V$ (OFF)		5	15	μA
	I_L	$V_{ON/OFF} = 0.5V$ (ON)		0.2	5	μA
Output Saturation Voltage	V_{CE}	$V_{FB}=0V$ $I_{out}=3A$		1.3	1.6	V
Max. Duty Cycle	D_{MAX}	$V_{FB}=0V$		100		%

Electrónica S.A. de C.V.

3A 150KHz 30V Buck DC to DC Converter

XL1507

Electrical Characteristics (System Parameters 3.3V Version)

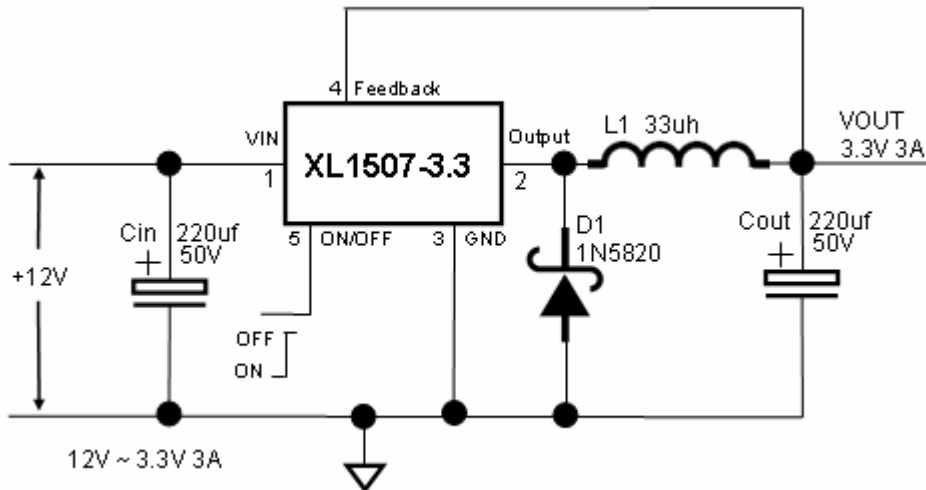


Fig5. XL1507 System Parameters Test Circuit

$T_a = 25$; unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Feedback Voltage	V_{FB}	$V_{in} = 6V$ to $30V$ $V_{out}=3.3V$, $I_{out}=0.5A$	3.168	3.3	3.432	V
VOUT Line Regulation	R_{LINE}	$V_{in} = 6V$ to $30V$ $V_{out}=3.3V$, $I_{out}=0.5A$		0.5	2	%
VOUT Load Regulation	R_{LOAD}	$V_{in}=12V$, $V_{out}=3.3V$ $I_{out}=0.2$ to $3A$		0.8	2	%
Switching Frequency	F_{output}	$V_{in}=12V$, $V_{out}=3.3V$ $I_{out}=0.5A$	127	150	173	KHz
Efficiency(12V~3.3V)	η	$V_{in}=12V$, $V_{out}=3.3V$ $I_{out}=3A$	-	75	-	%

3A 150KHz 30V Buck DC to DC Converter

XL1507

Electrical Characteristics (System Parameters 5V Version)

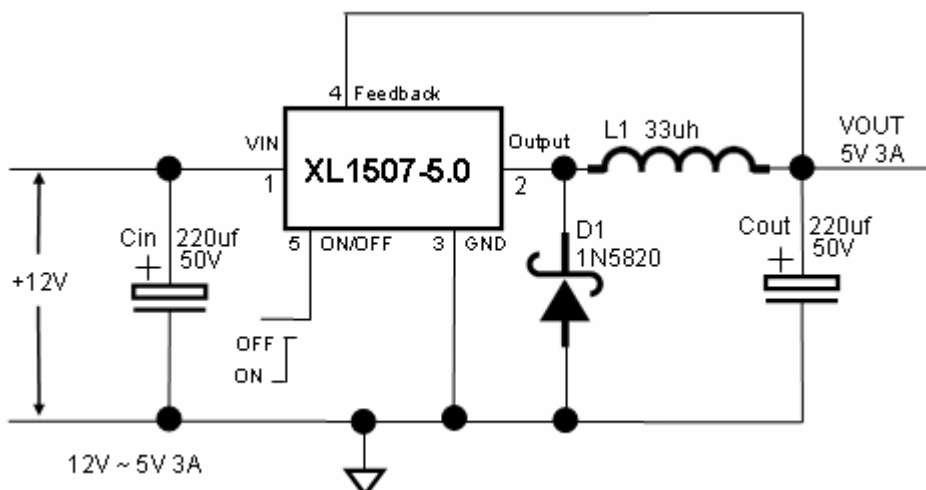


Fig6. XL1507 System Parameters Test Circuit

$T_a = 25$; unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Feedback Voltage	V_{FB}	$V_{in} = 8V$ to $30V$ $V_{out}=5V$, $I_{out}=0.5A$	4.8	5	5.2	V
VOUT Line Regulation	R_{LINE}	$V_{in} = 8V$ to $30V$ $V_{out}=5V$, $I_{out}=0.5A$		0.5	2	%
VOUT Load Regulation	R_{LOAD}	$V_{in}=12V$, $V_{out}=5V$ $I_{out}=0.2$ to $3A$		0.8	2	%
Switching Frequency	F_{output}	$V_{in}=12V$, $V_{out}=5V$ $I_{out}=0.5A$	127	150	173	KHz
Efficiency(12V~5V)	η	$V_{in}=12V$, $V_{out}=5V$ $I_{out}=3A$	-	80	-	%

3A 150KHz 30V Buck DC to DC Converter

XL1507

Electrical Characteristics (System Parameters 12V Version)

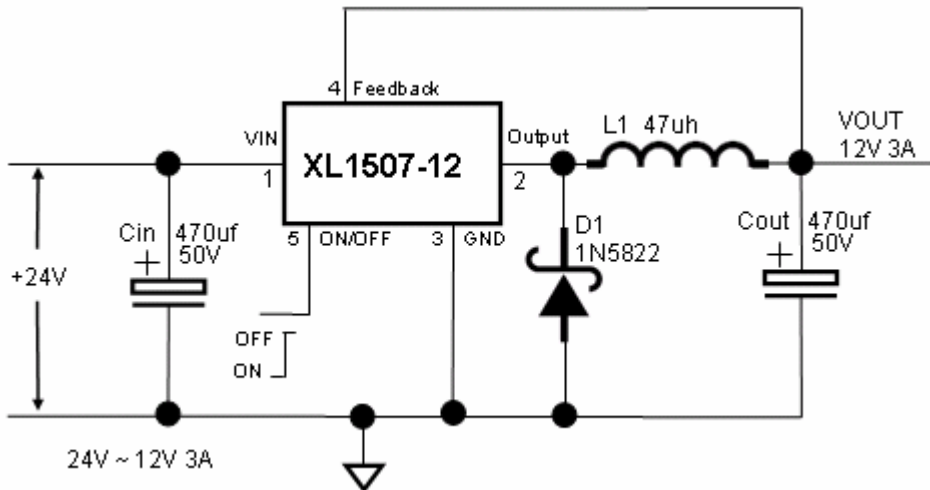


Fig7. XL1507 System Parameters Test Circuit

$T_a = 25$; unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Feedback Voltage	V_{FB}	$V_{in} = 15V \text{ to } 30V$ $V_{out}=12V, I_{out}=0.5A$	11.52	12	12.48	V
VOUT Line Regulation	R_{LINE}	$V_{in} = 15V \text{ to } 30V$ $V_{out}=12V, I_{out}=0.5A$		0.6	2	%
VOUT Load Regulation	R_{LOAD}	$V_{in}=24V, V_{out}=12V$ $I_{out}=0.2 \text{ to } 3A$		0.8	2	%
Switching Frequency	F_{output}	$V_{in}=24V, V_{out}=12V$ $I_{out}=0.5A$	127	150	173	KHz
Efficiency(24V~12V)	η	$V_{in}=24V, V_{out}=12V$ $I_{out}=3A$	-	89	-	%

3A 150KHz 30V Buck DC to DC Converter

XL1507

Electrical Characteristics (System Parameters ADJ Version)

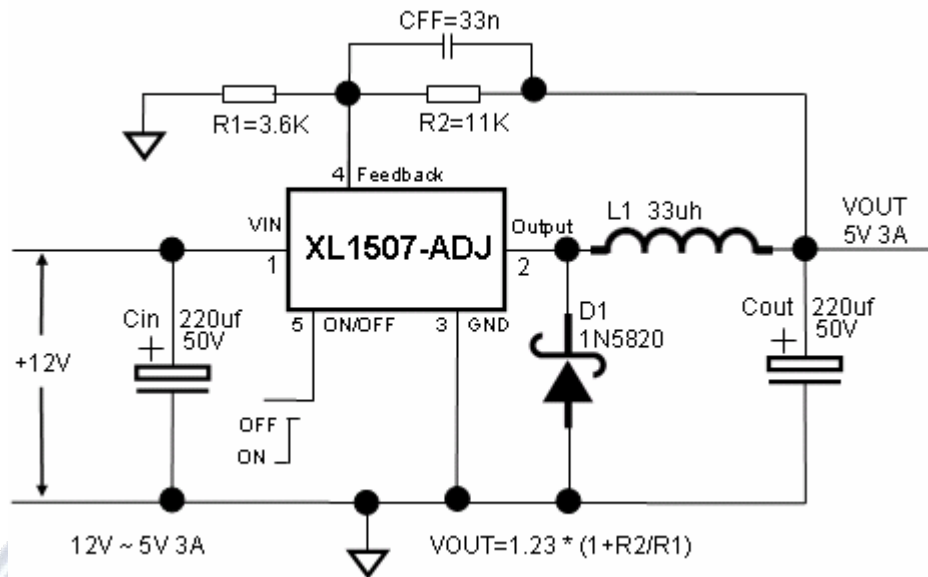


Fig8. XL1507 System Parameters Test Circuit


(The CFF is optional. It provides additional stability for high output voltages, low input-output voltages, and/or very low ESR output capacitors, such as solid tantalum capacitors)

$T_a = 25^\circ\text{C}$ unless otherwise specified.


Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Feedback Voltage	V_{FB}	$V_{in} = 8\text{V to } 30\text{V}$ $V_{out}=5\text{V}, I_{out}=0.5\text{A}$	1.193	1.23	1.267	V
VOUT Line Regulation	R_{LINE}	$V_{in} = 8\text{V to } 30\text{V}$ $V_{out}=5\text{V}, I_{out}=0.5\text{A}$		0.5	2	%
VOUT Load Regulation	R_{LOAD}	$V_{in}=12\text{V}, V_{out}=5\text{V}$ $I_{out}=0.2 \text{ to } 3\text{A}$		0.8	2	%
Switching Frequency	F_{output}	$V_{in}=12\text{V}, V_{out}=5\text{V}$ $I_{out}=0.5\text{A}$	127	150	173	KHz
Efficiency(12V~5V)	η	$V_{in}=12\text{V}, V_{out}=5\text{V}$ $I_{out}=3\text{A}$	-	80	-	%

Typical Performance Characteristics (Circuit of Figure 8)

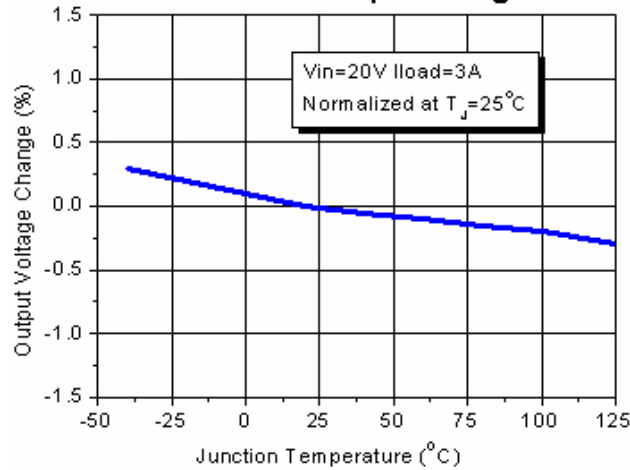
Normalized Output Voltage




Dropout Voltage

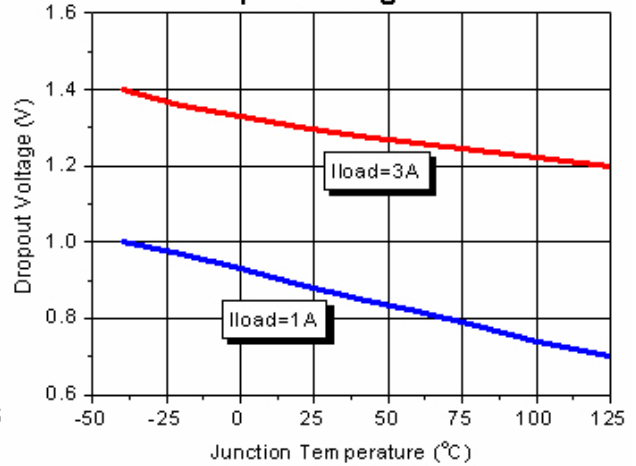

Operating Quiescent Current

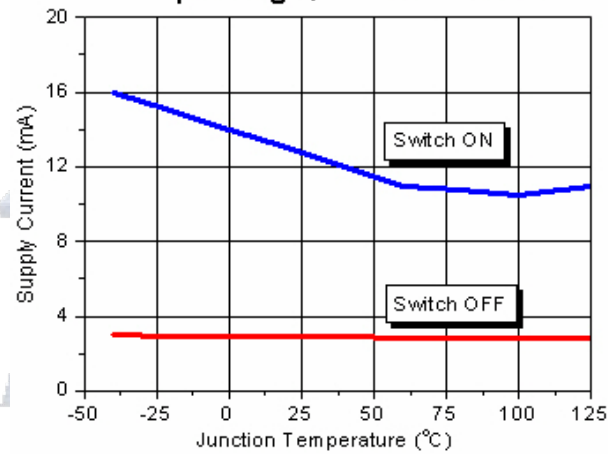

ON/OFF Threshold Voltage

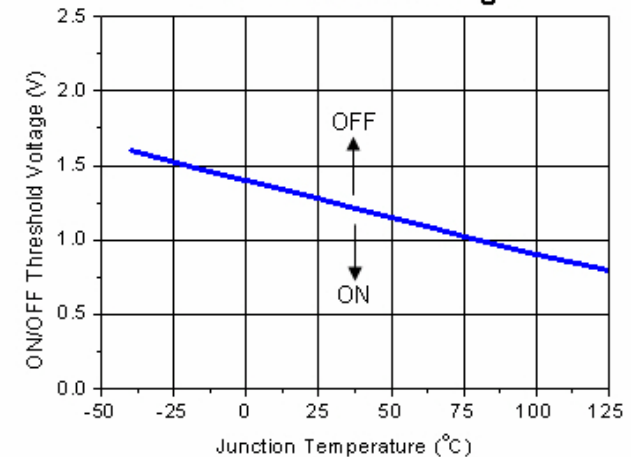


3A 150KHz 30V Buck DC to DC Converter

XL1507

Package Information

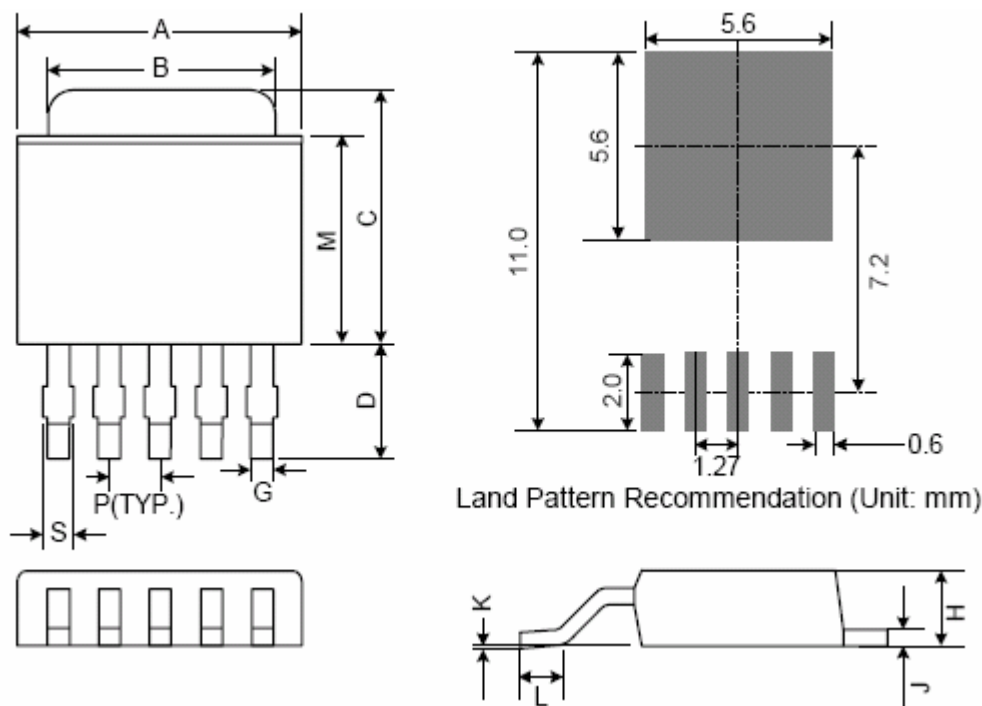(1) TO252-5L



Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	6.35	6.60	6.85	0.250	0.260	0.270
B	5.20	5.35	5.50	0.205	0.211	0.217
C	6.80	7.00	7.30	0.268	0.276	0.287
D	2.20	2.50	2.80	0.087	0.098	0.110
P	1.27 REF.			0.050 REF.		
S	0.50	0.65	0.80	0.020	0.026	0.031
G	0.40	0.50	0.63	0.016	0.020	0.025
H	2.20	2.30	2.40	0.087	0.091	0.094
J	0.45	0.52	0.58	0.018	0.020	0.023
K	0.00	0.08	0.15	0.000	0.003	0.006
L	0.90	1.20	1.63	0.035	0.047	0.064
M	5.40	5.80	6.20	0.213	0.228	0.244